

CANYCOM S120A TRACKED DUMPER



For Construction and Landscaping

Compact tracked dumper with pivoting bucket for different application. Heavy duty rubber tracks and roller system provides a comfortable ride and minimises ground damage. Easy access in narrow job sites & Climb up to 20 degrees with ease.

Max. Payload
1,200kg

Engine
KUBOTA D902


Dumping type
Swivel

Speed
5.6km/h

Dimensions
L2670 / W990 / H2330mm



Comfort as priority.
Good seating position

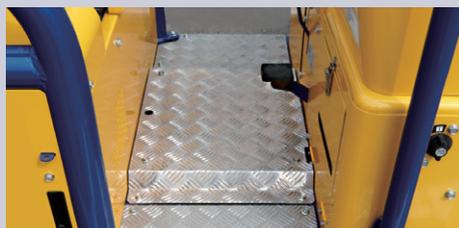


Wide foot space



Easy to reach
all the control levers



Folding ROPS
For transport and job site with limited height

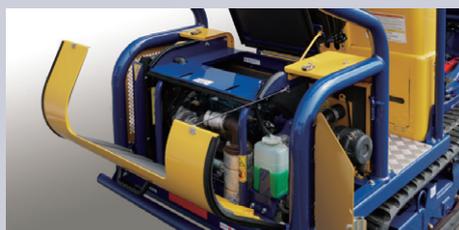


Wide opening covers
For an easy access to E/G components



Battery switch



Compact

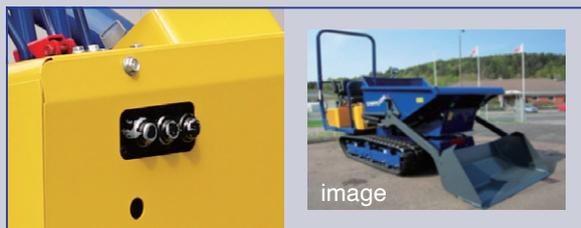

Auxiliary third valve for attachment like self loader etc.



CHIKUSUI CANYCOM, INC.

HAKATA OFFICE(OVERSEAS DIV.)

Yutoku Bldg 6F, 1-5 Nakagofuku-machi, Hakata, Fukuoka, 812-0035, JAPAN

TEL +81-92-272-1104 FAX +81-92-272-1119

e-mail exinfo@canycom.co.jp



SPECIFICATIONS SHEET FOR S120A



Machine Mass	kg	1100	
Maximum Payload	kN(kgf)	11.8 (1200)	
HST Oil Capacity	L	20	
Operating Temperature	°C	between -15°C and +40°C	
Operating Elevation	m	below 1500 *1	
Dimensions			
Overall Length	mm	2670	
Overall Width	mm	990	
Overall Height	mm	2330	
Tumbler Length	mm	1160	
Track Tread	mm	760	
Minimum Ground Clearance	mm	145	
Floor Height	mm	620	
Loading Deck			
Inside Dimensions	Length	mm	1340
	Width	mm	890
	Height	mm	490
Payload	Struck	m ³ (kg)	0.39 (860)
	Heaped	m ³ (kg)	0.59 (1180)
Engine			
Model		Kubota D 902	
Type		4-cycle, Water-cooled Diesel	
Cylinder (Bore X Stroke)	mm	72 x 73.6	
Total Displacement	cm ³	898	
Rated Output	kW(PS)/rpm	13.2 (17.9) / 2600 *net	
Maximum Torque	N·m/rpm	53.5 / 2200 *net	
Starting		Electric	
Fuel used		Diesel Fuel	
Fuel Consumption	g/kW·h	271	
Fuel Tank Capacity	L	15.0	
Lubricating Oil Capacity	L	3.7	
Battery Capacity	V/AH	12/52	
Performance			
Travel Speed	km/h	0 to 5.6	
Minimum Turning Radius	m	1.55	
Gradability	Degrees	25 (unloaded)	
Drive Train			
Main Transmission		Twin HST	
Steering System		Twin HST - 2 Lever	
Brakes		Internally Expanding	
Dumping System			
Dump System		Swivel Dump	
Hydraulic Pump	Type	Gear Pump	
	Max. Discharge	L/min	10.0
Relief Pressure	MPa(kgf/cm ²)	14.2 (145)	
Dumping Max. Angle	Degrees	90	
Swivel System			
Swivel System		Hydraulic (Twin cylinder)	
Swiveling Angle	°	90(Right) - 90 (Left)	

*1 Engine performance is reduced when used above 1500m of elevation.
These specifications are subject to change without notice.

CANYCOM S120A